


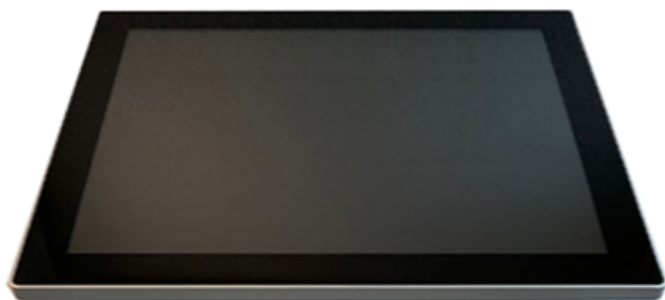

Specification

System	Processor	Intel® Core i7-4770 Quad-Core, clock speed 3.90GHz, TDP 84W
	Chipset	H81 chipset
	System Memory	2x DDR3 1333/1600MHz SO-DIMM up to 16GB
	Storage Device	1x 2.5" SATA HDD or SSD or mSATA module
	Graphic Engine	Intel HD Graphics
	DIO	Digital I/O 4 in/ 4 out
	Watchdog	With Watchdog Timer
LCD Touch Panel	LCD Size	21.5"
	Brightness	250 nits (400 nits optional)
	Resolution	1920 x 1080
	Touch Screen	True-Flat PCAP Touch (IP67 Front)
Expansion	Mini PCIe Slot	1
	PCIe	1
External I/O Ports	USB	2x USB 3.0, 2x USB 2.0 (Optional 6 x USB 2.0)
	Serial Port	2x RS-232 (Optional 3 x RS-232, 1 x RS-232/422/485)
	LAN	1x LAN
	Display	1x DVI, 1x HDMI
Audio	Internal Speaker	1x Speaker Header
Power	Power Supply	Power adapter
	Connector	DCIN Input: 12-19V
Environment	Ventilation	With Fan
	Dust & Water Proof	Front IP67, Aluminum front bezel, metal housing
	Operating Temperature	0 ~ 60°C (32 ~ 140°F)
	Storage Temperature	-20 ~ 70°C (-4 ~ 176°F)
	Humidity	5% ~ 95% R/H, non-condensing

Dimensions (WxDxH) 537.8 x 329.3 x 60 mm

Weight 5.5 kg

Mounting VESA Mount 75 x 75 or 100 x 100 mm

OS Supported Win7, Win 8, Win10 IOT, Linux

