




Specification

System	Processor	Intel® Core i5-7200U Dual-Core, clock speed 2.50GHz, TDP 15W
	Chipset	CPU Integrated, TPM 2.0 support
	System Memory	1x DDR3L 1333/1600MHz SO-DIMM up to 8GB
	Storage Device	1x 2.5" SATA HDD or SSD or mSATA module
	Graphic Engine	Intel HD Graphics
	DIO	Digital I/O 4 in/ 4 out
	Watchdog	With Watchdog Timer
LCD Touch Panel	LCD Size	21.5"
	Brightness	250 nits (400 nits optional)
	Resolution	1920 x 1080
	Touch Screen	True-Flat PCAP Touch (IP67 Front)
Expansion	Mini PCIe Slot	2 (1x slot co-lay with mSATA)
	RFID Reader	Support 125 KHz & 13.56 MHz (Optional)
External I/O Ports	USB	2x USB 3.0, 2x USB 2.0 (Optional 2x USB 3.0, 4x USB 2.0)
	Serial Port	2x RS-232 (Optional 4x RS-232 or 3x RS-232 + 1x RS-485)
	LAN	2x LAN
	Display	1x VGA, 1x HDMI
Audio	Internal Speaker	2x Stereo speaker (Optional)
Power	Power Supply	Power adapter
	Connector	DCIN Input: 9-28V, Connector type: 1x Phoenix connector
Environment	Ventilation	Fanless
	Dust & Water Proof	Front IP67
	Operating Temperature	0 ~ 60°C (32 ~ 140°F)
	Storage Temperature	-20 ~ 70°C (-4 ~ 176°F)
	Humidity	5% ~ 95% R/H, non-condensing
Dimensions (WxDxH)	537.8 x 329.3 x 52 mm	
Weight	5 kg	
Mounting	VESA Mount 100 x 100 mm	
OS Supported	Win7, Win 8, Win10 IOT, Linux	

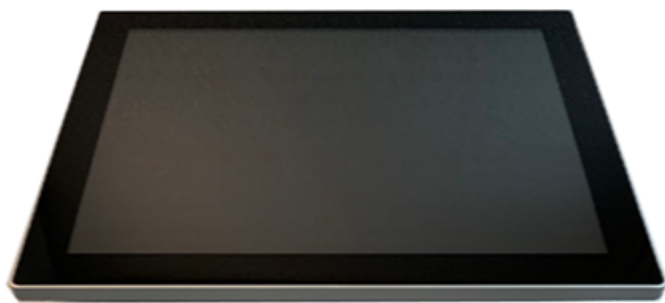