




10.1" Touch Panel PC  
with PoE-PD function




### Specification

<b>System</b>	Processor Chipset System Memory Storage Device Graphic Engine DIO Watchdog	Intel Celeron Apollo Lake N3350 Dual core 6W processor CPU Integrated, TPM 2.0 support 1x DDR3L 1600/1866MHz SO-DIMM up to 8GB 1x 2.5" SATA HDD or SSD or mSATA module Intel HD Graphics Digital I/O 8 in/ 8 out With Watchdog Timer
<b>LCD Touch Panel</b>	LCD Size Brightness Resolution Touch Screen	10.1" (16:10 ratio) 350 nits 1280 x 800 (HD) True-Flat PCAP Touch or Resistive Touch (Optional)
<b>Expansion</b>	Mini PCI-E Slot	2 (1x slot co-lay with mSATA)
<b>External I/O Ports</b>	USB Serial Port LAN Display	2x USB3.0, 1x USB2.0 2x RS-232/RS-422/RS-485 2x LAN (1x POE-PD) 1x VGA, 1x HDMI
<b>Audio</b>	Internal Speaker	Speaker Header x1
<b>Power</b>	Power Supply Connector	60W POE Power Adapter (Optional)
<b>Environment</b>	Ventilation Dust & Water Proof Operating Temperature Storage Temperature Humidity	Fanless Front IP65, Aluminum front bezel, true flat design 0°C ~ 60°C -25°C ~ 75°C 5% ~ 95% RH non-condensing
<b>Dimensions (WxDxH)</b>		257.2 x 170.9 x 51 mm
<b>Weight</b>		2.0 kg
<b>Mounting</b>		VESA Mount 75 x 75 mm
<b>OS Supported</b>		Win7, Win 8, Win10 IOT, Linux

SIDE



FRONT

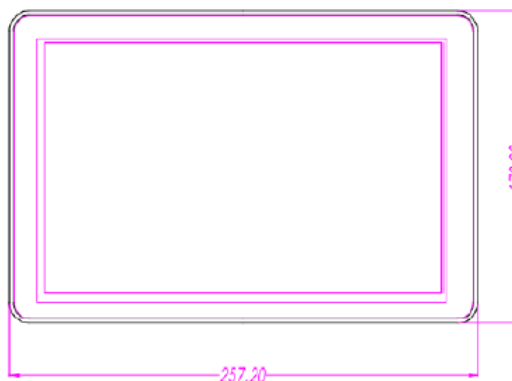

BACK

